


Cat.6 U/UTP Patch Cord

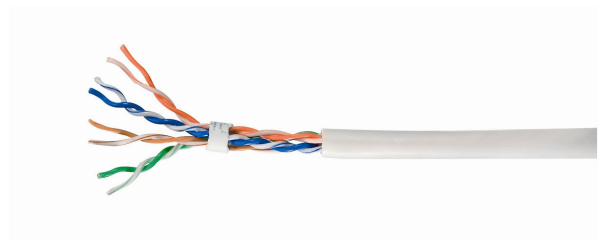

The equip[®] Cat.6 U/UTP Patch Cord is composed of preeminent materials and fully-examined to comply with industrial standards. Offering higher bandwidth and better signal-to-noise margin, the Cat.6 cable is able to deliver ultrahigh and error-free performance in the most demanding network environments.


| Key Feature

- 26AWG
- 250MHz
- Stranded
- Unshielded
- Gold plated pins
- Molded boot
- Cable length printed on plug
- UL/CUL, TIA/EIA certified

| Typical Applications

- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T
- IEEE 802.5 16 MB; ISDN; TPDDI; ATM


| Structure

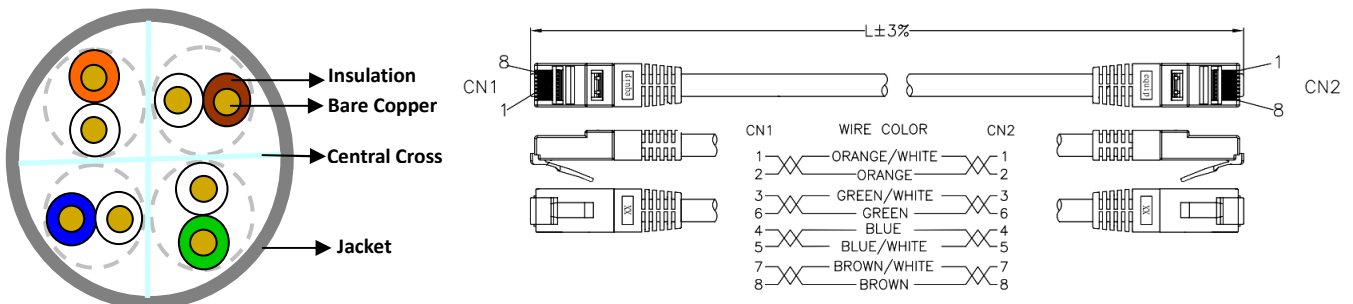

| Specification

Conductor	Material	Bare Copper
	Construction	26AWG, 7/0.155 ± 0.015mm
Insulation	Thickness	MIN at any point: 0.14 mm / MAX AVG:0.16 mm
	Diameter	0.75 ± 0.01mm
	Colors	Blue-White/Blue, Orange-White/Orange, Green-White/Green, Brown-White/Brown
Jacket	Material	PVC
	Thickness	MIN at any point: 0.58mm / MAX AVG: 0.62mm
	Diameter	5.0 ± 0.2mm
	Marking	equip CAT6 U/UTP PATCH CABLE E213738 CM (UL) C(UL) 4PR 26AWG ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 VERIFIED
Connector	RJ45 Plug	8P8C, Two Fork 3u" Gold

| Ordering Information

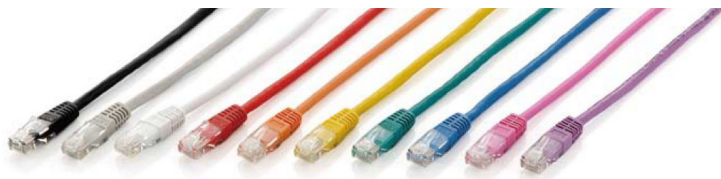

	beige	red	blue	green	yellow	white	orange	black	pink	purple
0.25m	805513	805523	805533	805543	805563	805503	805573	805593	805583	805553
0.5m	805517	805527	805537	805547	805567	805507	805577	805597	805587	805557
1m	805510	805520	805570	805580	805560	805505	805575	805595	805585	805555
2m	805511	805521	805531	805541	805561	805501	805571	805591	805581	805551
3m	805512	805522	805532	805542	805562	805502	805572	805592	805582	805552
5m	805514	805524	805534	805544	805564	805504	805574	805594	805584	805554
7.5m	805515	805525	805535	805545	805565	815505	815575	815595	815585	815555
10m	805516	805526	805536	805546	805566	805506	805576	805596	805586	805556
15m	805518	805528	805538	805548	805568	805508	805578	805598	805588	805558
20m	805519	805529	805539	805549	805569	805509	805579	805599	805589	805559

Packing: equip zip bag