


Cat.6 U/UTP Patch Cord

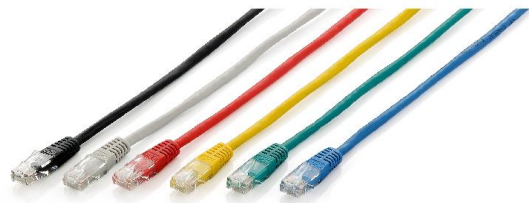


The equip[®] Cat.6 U/UTP Patch Cable is composed of preeminent materials and fully-examined to conform with industrial standards. Offering higher bandwidth and better signal-to-noise margin, the Cat.6 cable is able to deliver ultrahigh and error-free performance in the most demanding network environments.

| Key Feature

- Stranded AWG 26 Patch Cord with 250MHz Performance.
- High performance and easy installation
- Gold Plating Pin Provides the Highest Interconnect Reliability
- Cable Length Printing on Plug


| Structure

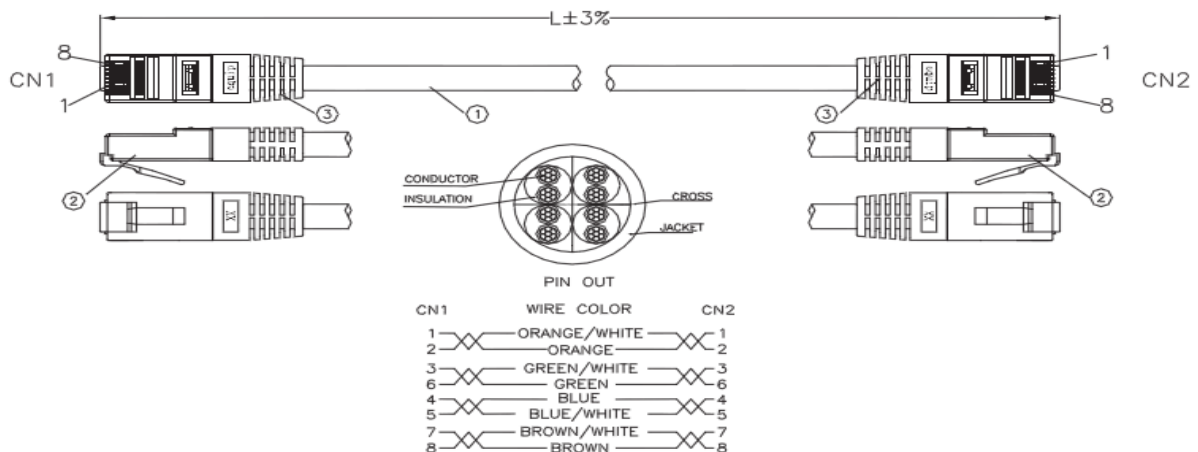

Specification

Conductor	Construction	26AWG, 7/0.16 ± 0.015mm
Insulation	Thickness	MIN at any point: 0.11mm MAX AVG:0.13mm
	Diameter	0.74± 0.02mm
	Colors	Blue/White-Blue, Orange/White-Orange, Green/White-Green, Brown/White-Brown
Jacket	Material	PVC
	Thickness	MIN at any point: 0.45mm MAX AVG: 0.55mm
	Diameter	5.0± 0.3mm
	Marking	equip CAT6 U/UTP PATCH CABLE 4PR 26AWG ISO/IEC 11801 & EN 50288 & TIA/EIA-568-C.2
Connector	RJ45 Plug	8P8C, 3u"
Typical Applications		IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T ; 10GBASE-T IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Ordering Information

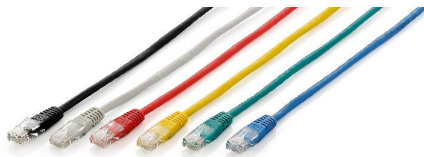

	Beige	Red	Blue	Green	Black	Yellow
0.25m	625413	625423	625433	625443	625453	625463
0.5m	625417	625427	625437	625447	625457	625467
1.0m	625410	625420	625430	625440	625450	625460
2.0m	625411	625421	625431	625441	625451	625461
3.0m	625412	625422	625432	625442	625452	625462
5.0m	625414	625424	625434	625444	625454	625464
7.5m	625415	625425	625435	625445	625455	625465
10m	625416	625426	625436	625446	625456	625466
15m	625418	625428	625438	625448	625458	625468
20m	625419	625429	625430	625449	625459	625469

Packing: Poly bag