

# bizhub C287

# ⊘ Colour A3 multifunctional ✓ Up to 28 pages per minute


#### Functionality



#### DATASHEET bizhub C287

### Technology

Emperon™ – print controller	Easily compatible with different users and IT environments through Konica Minolta's unified print technology	<ul> <li>✓</li> </ul>
Simitri® HD – polymerised toner	Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact	<ul> <li>✓</li> </ul>
OpenAPI – solution platform	Server-based applications provide efficient workflows for the entire MFP fleet	<ul> <li>✓</li> </ul>
i-Option – special feature	Offers extended scope and advanced MFP functionality in line with individual requirements	<ul> <li>✓</li> </ul>
CSRC – remote service	Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service	<ul> <li>✓</li> </ul>
IWS – panel customisation	Improved user-device interaction and enhanced productivity through full MFP panel customisation	<ul> <li>✓</li> </ul>

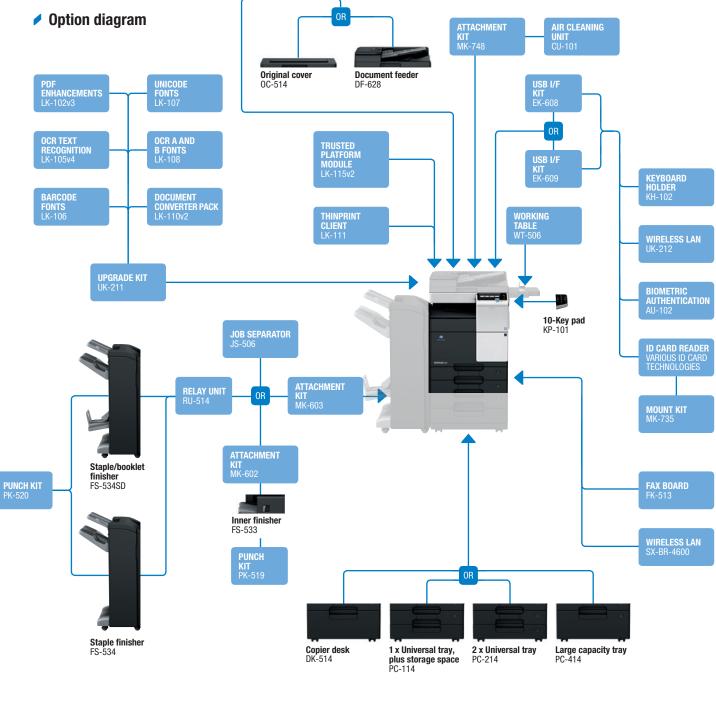

# Finishing functionalities

		E								
Corner stapling	Two-point stapling	Two-hole punching	Four-hole punching	Duplex	Combined mixplex/ mixmedia	Half-fold	Sheet insertion, report	Letter-fold	Booklet	Offset sorting

# Descriptions

bizhub C287	Communication centre with 28 ppm b/w and colour.
	Standard Emperon <sup>™</sup> print controller with PCL 6 (PCL
	5c + XL 3.0), PostScript 3, PDF 1.4, XPS and 00XML
	support. Paper capacity of 500 + 500 sheets and
	100-sheet manual bypass. Media from A6 to A3 and
	60 – 256 gsm. 2 GB memory, 250 GB hard disk and
	Gigabit Ethernet standard.
DF-628 Document feeder	Reversing automatic document feeder, capacity 100
	originals
OC-514 Original cover	Cover instead of ADF
PC-114 1 x Universal tray	A5–A3, 500 sheets, 60–256 gsm
PC-214 2 x Universal tray	A5–A3, 2 x 500 sheets, 60–256 gsm
PC-414 Large capacity tray	A4, 2,500 sheets, 60-256 gsm
DK-514 Copier desk	Provides storage space for print media and other
	materials
MK-602 Attachment kit	For FS-533 installation
MK-603 Attachment kit	For FS-533, FS-534/SD, JS-506 installation
FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output
PK-519 Punch kit	2/4 hole punching, autoswitching
for FS-533	
FS-534 Staple finisher	50-sheet stapling, 3,300 sheets max. output
FS-534SD Booklet finisher	50-sheets staple finisher, 20-sheets booklet finisher,
	2,300 sheets max. output
RU-514 Relay unit for FS-534	For FS-534 installation
PK-520 Punch kit	2/4 hole punching, autoswitching
for FS-534/SD	
JS-506 Job separator	Separation for fax output etc.
,	

KP-101 10-Key pad	For use instead of touchscreen
WT-506 Working table	Authentication device placement
FK-513 Fax board	G3 fax, digital fax functionality
KH-102 Keyboard holder	To place USB keyboard
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection, Bluetooth LE
ID card reader	Various ID card technologies
MK-735 Mount kit	Installation kit for ID card reader
AU-102	Finger vein scanner
Biometric authentication	
LK-102v3	PDF/A, PDF encryption, digital signature
PDF enhancements	
LK-105v4	Searchable PDF and PPTX
OCR text recognition	
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document	Generates various file formats incl. DOCX, XLSX and
converter pack	PDF/A
LK-111 ThinPrint® Client	Print data compression for reduced network impact
LK-115v2 TPM activation	Trusted Platform Module for protection of data encryp-
	tion and decryption
UK-211 Upgrade kit	2 GB memory extension for upgrades
UK-212 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
SX-BR-4600 Wireless LAN	Wireless LAN to network connector
MK-748 Attachment kit	Installation kit for CU-101
CU-101 Air cleaning unit	Improving indoor air quality by reduced emissions
MK-748 Attachment kit	Installation kit for CU-101

# Technical specifications

#### SYSTEM SPECIFICATIONS

SYSTEM SPECIFICATIO				
System memory	2,048 MB (standard)			
System hard disk	250 GB (standard)			
Interface	10-Base-T/100-Base-T/1,000-Base-T Ethernet; USB 2.0;			
	Wi-Fi 802.11b/g/n (optional)			
Network protocols	TCP/IP (FTP; SMB; SMTP; WebDAV) (IPv4/IPv6)			
Frame types	Ethernet 802.2; Ethernet 802.3; Ethernet II; Ethernet SNAP			
Automatic document	Up to 100 originals; A6–A3; 35–128 gsm			
feeder	RADF optional avaiable			
Printable paper size	A5–A3; A6S; banner paper; Thick Paper X/Y size input			
	range: Width: 90–297 mm; Length: 139.7–431.8 mm			
Printable paper weight	60–256 gsm			
Paper input capacity	Standard: 1,100 sheets			
	Max.: 3,600 sheets			
Tray 1	500 sheets; A5-A4; 60-256 gsm			
Tray 2	500 sheets; A5-A3; 60-256 gsm			
Tray 3 (optional)	500 sheets; A5-A3; 60-256 gsm			
Tray 4 (optional)	2 x 500 sheets; A5-A3; 60-256 gsm			
Large capacity tray	2,500 sheets; A4; 60-256 gsm			
(optional)	· · · · · · ·			
Manual bypass	100 sheets; A6–A3; 60-256gsm			
Automatic duplexing	A5–A3; 60–256 gsm			
Finishing modes	Offset; group; sort; staple; punch; centre-fold; letter fold;			
(optional)	booklet			
Output capacity	Max.: 3,300 sheets			
(with finisher)	,			
Output capacity	Max.: 250 sheets			
(without finisher)				
Stapling	Max.: 50 sheets or			
	48 sheets + 2 cover sheets (up to 209 gsm)			
Stapling output capacity				
Letter fold	Up to 3 sheets			
Letter fold capacity	Max.: 30 sheets (tray); unlimited			
Booklet	Max.: 20 sheets or			
	19 sheets + 1 cover sheet (up to 209 gsm)			
Booklet output capacity	Max.: 100 sheets			
Copy/print volume	Rec.: 13,000 pages			
(monthly)	Max. <sup>1</sup> : 28,000 pages			
Toner lifetime	Black 24,000 pages; CMY 21,000 pages			
Imaging unit lifetime	Black 105,000 pages/600,000 pages (Drum/Developer)			
ուներություն որերություն	CMY 90,000 pages (Imaging Unit)			
Power consumption				
rower consumption	220–240 V / 50/60 Hz; Less than 1.6 kW (system)			
	595 y 660 y 797 mm (main body)			
System dimensions	585 x 660 x 787 mm (main body)			
	585 x 660 x 787 mm (main body) Approx. 72 kg (without options/toner)			

#### COPIER SPECIFICATIONS

CUPIER SPECIFICATI			
Copying process	Electrostatic laser copy; indirect		
Toner system	Simitri <sup>®</sup> HD polymerised toner		
Copy/print speed A4	Up to 28 ppm		
Copy/print speed A3	Up to 14 ppm		
Autoduplex speed A4	Up to 25 ppm		
1st copy out time	6.8 sec/8.4 sec		
(mono/colour)			
Warm-up time	Approx. 20 sec. <sup>2</sup>		
Copy resolution	600 x 600 dpi		
Gradation	256 gradations		
Multicopy	1-9,999		
Original format	A5-A3		
Magnification	25–400% in 0.1% steps; auto-zooming		
Copy functions	Chapter; cover and page insertion; proof copy; adjustment		
	test print; job setting memory; poster mode; image repeat;		
	overlay (optional, with UK-211); stamping; copy protection		

<sup>1</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

<sup>2</sup> Warm-up time may vary depending on the operating environment and usage



ONS			
1,800 (equivalent) x 600 dpi			
PCL 6 (PCL 5c + XL 3.0); PostScript 3 (CPSI 3016); XPS			
Windows VISTA (32/64)			
Windows 7 (32/64)			
Windows 8 (32/64)			
Windows 8.1 (32/64)			
Windows 10 (32/64)			
Windows Server 2008/2008 R2 (32/64)			
Windows Server 2012/2012 R2 (64)			
Macintosh OS X 10.x			
Linux, Citrix			
80 PCL Latin; 137 PostScript 3 Emulation Latin			
Direct print of PCL; PS; TIFF; XPS; PDF (v1.4); encrypted			
PDF files and OOXML (DOCX; XLSX; PPTX); mixmedia and			
mixplex; "Easy Set" job programming; overlay; watermark;			
copy protection; carbon copy print			
AirPrint (iOS); Mopria (Android); Google Cloud Print			
(optional); WiFi Direct (optional); Konica Minolta Print			
Service (Android); PageScope Mobile (iOS & Android); NFC			
Authentication and Pairing (Android)			

#### SCANNER SPECIFICATIONS

Scan speed (with	Up to 45 ipm
optional document	
feeder) (mono/colour)	
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me)
	Scan-to-SMB (Scan-to-Home)
	Scan-to-FTP
	Scan-to-Box
	Scan-to-USB
	Scan-to-WebDAV
	Scan-to-DPWS
	Network TWAIN scan
File formats	TIFF; PDF; Compact PDF; JPEG; XPS; Compact XPS;
	DOCX; XLSX (optional); searchable PDF (optional); PDF/A;
	linerarized PDF
Scan destinations	2,100 (single + group); LDAP support
Scan functions	Annotation (text/time/date) for PDF; up to 400 job programs;
	Realtime scan preview

#### FAX SPECIFICATIONS

Fax standard	G3 (optional)		
Fax transmission	Analogue		
	i-Fax		
	Colour i-Fax		
	IP-Fax		
Fax resolution	Max.: 600 x 600 dpi (ultra-fine)		
Fax compression	MH; MR; MMR; JBIG		
Fax modem	Up to 33.6 Kbps		
Fax destinations	2,100 (single + group)		
Fax functions	Polling; time shift; PC-Fax; receipt to confidential box;		
	Receipt to e-mail/FTP/SMB; up to 400 job programs		

Max. storable	Up to 3,000 documents or 10,000 pages			
documents				
Type of user boxes	Public			
	Personal (with password or authentication)			
	Group (with authentication)			
Type of system boxes	Secure print			
	Encrypted PDF print			
	Fax receipt			
	Fax polling			
User box functionality	Reprint; combination			
	Download			
	Sending (e-mail/FTP/SMB and fax)			
	Copy box to box			
SYSTEM FEATURES				
Security	ISO 15408/IEEE 2600.2 compliant (in evaluation);			
	IP filtering and port blocking;			
	SSL2; SSL3 and TSL1.0 network communication;			
	IPsec support; IEEE 802.1x support; user authentication;			
	Authentication log; secure print;			
	Hard disk overwrite (8 standard types);			
	Hard disk data encryption (AES 256);			
	Memory data auto deletion: Confidential fax receipt;			
	Print user data encryption; copy protection			
Accounting	Up to 1,000 user accounts; Active Directory support			
-	(user name + password + e-mail + smb folder)			
	User function access definition			
	Biometric authentication (finger vein scanner) optional			
	ID card authentication (ID card reader) optional			
Software	PageScope Net Care Device Manager			
	PageScope Data Administrator			
	PageScope Box Operator			
	PageScope Direct Print			
	Print Status Notifier			
	Driver Packaging Utility			
	Log Management Utility			

- All specifications refer to A4-size paper of 80 gsm quality.
   The support and availability of the listed specifications and functionalities varies depending on
- operating systems, applications and network protocols as well as network and system configurations. The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity. – Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minotta does not warrant that any specifications mentioned will be error-free.
   All brand and product names may be registered trademarks or trademarks of their respective
- holders and are hereby acknowledged.

